


SPEED mph [kph]	No. ELEMENTS	LENGTH (Appox.) ft-in [mm]
30 [50]	2	9'-10" [3000]
35 [60]	3	13'-0" [3950]
40 [65]	4	16'-2" [4950]
45 [70] TL-2	5	19'-4" [5900]
50 [80]	6	22'-6" [6900]
55 [90]	7	25'-8" [7800]
60 [100] TL-3	9	32'-0" [9750]
65 [105]	10	35'-2" [10750]
70 [110]	11	38'-4" [11700]

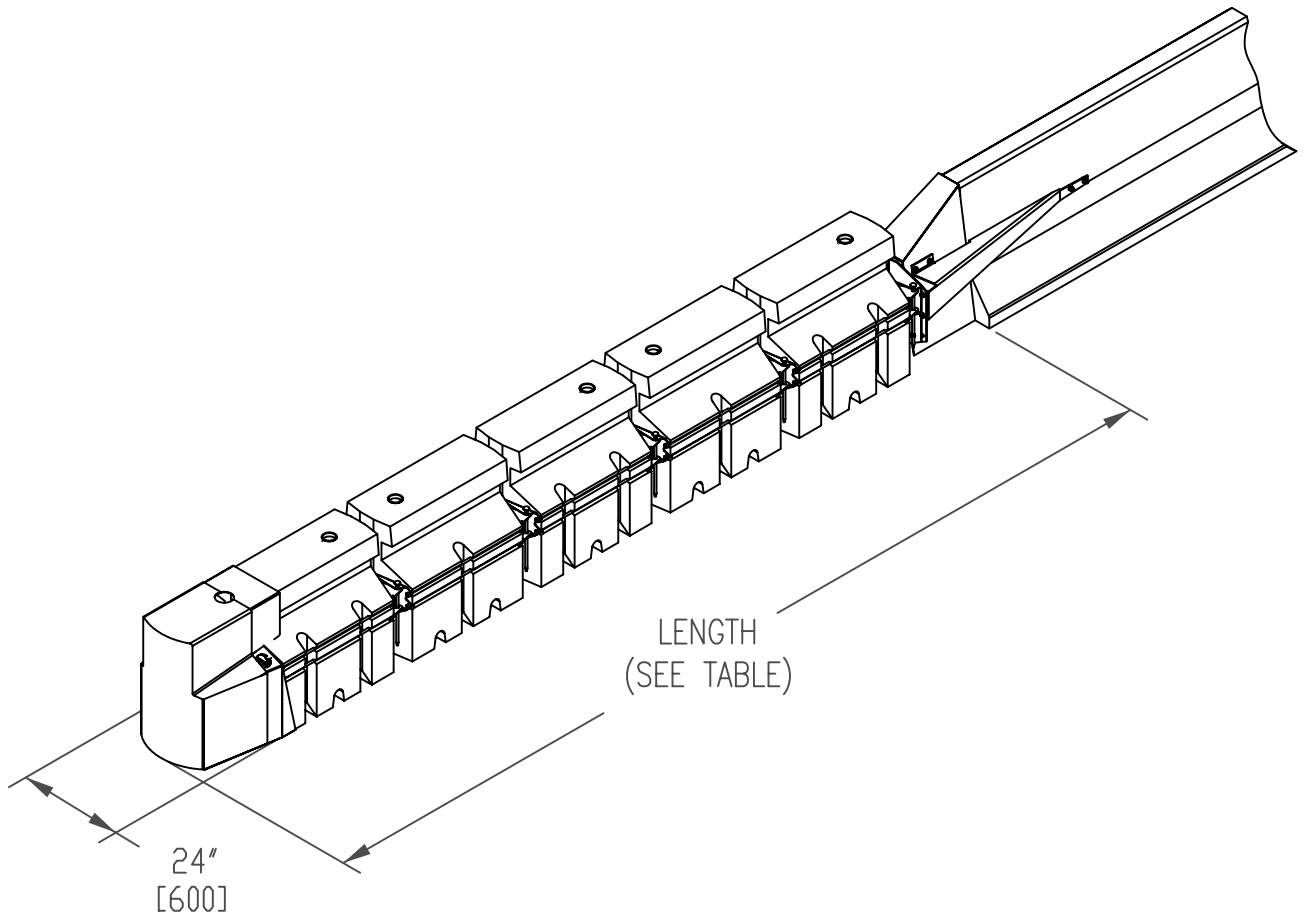

2005

ABSORB 350®

**BARRIER SYSTEMS INC**

SCI11

SHEET NO.

DATE

1 OF 2

5/13/05

## INTENDED USE

The ABSORB 350<sup>®</sup> system is a non-redirective, gating crash cushion. As with other non-redirective, gating crash cushions, a proper clear zone must be established behind the system. Test Level 2 systems use 5 elements and Test Level 3 systems use 9 elements. The ABSORB 350<sup>®</sup> shall be attached to temporary or permanent safety shaped concrete barrier and requires no foundation or foundation anchoring. The ABSORB 350<sup>®</sup> system can be located on firm soil, stable base, asphalt, or concrete surfaces capable of supporting it's weight. Contact manufacturer for further information and installation instructions.

## APPROVALS

The ABSORB 350<sup>®</sup> system has been fully tested in conformance with NCHRP Report 350 Test Levels 2 and 3 and approved by FHWA.

FHWA Acceptance Letters:      CC-66, May 11, 2000  
                                                 CC-66A, June 27, 2000  
                                                 CC-66B, December 9, 2003

## CONTACT INFORMATION

Contact manufacturer for further information:

Barrier Systems, Inc.  
180 River Road  
Rio Vista, CA 94571  
[www.barriersystemsinc.com](http://www.barriersystemsinc.com)

Phone: 888-800-3691 or 707-374-6800  
Fax: 707-374-6801  
Email: [info@barriersystemsinc.com](mailto:info@barriersystemsinc.com)

PHOTO

# ABSORB 350<sup>®</sup>

SCI11

**BARRIER SYSTEMS INC**

SHEET NO.	DATE
2 OF 2	5/13/05